



www.armstrong-ceilings.co.uk
www.armstrong.ae
www.armstrong.com.tr
www.armstrong.ru

Armstrong®

TATRA



Recycled Content



Light Reflectance




Intelligibility

TATRA

BOARD




Prelude XL²/TLX 24 mm



TEGULAR



Prelude XL²/TLX 24 mm



600 x 600 x 15 mm
600 x 1200 x 15 mm

958 M
952 M

962M



EN ISO 354 &
EN ISO 11654


α_w	NRC	125	250	500	1000	2000	4000	Hz
0.55(H)	0.55	0.40	0.35	0.50	0.70	0.70	0.75	α_p

Sound Absorption Class = D



EN ISO 10848-2
/ EN 20140-9
& EN ISO 717-1

Dncw
34 dB

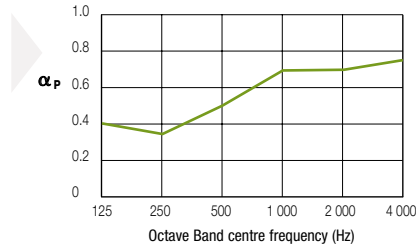

EN 13501-1

EEA Euroclass A2-s1, d0

RUS Hard combustible (G-1): GOST 30244-94;
V1, D1, T1 NPB 244-97



EN 12667
& ISO 8301

$\lambda = 0.06$ W/m K



70 % RH



≈ 3.5 kg/m²

- Please contact our Internal Technical Sales Group for further details.
- За более подробной информацией обращайтесь пожалуйста в представительство компании Армстронг.
- Daha fazla bilgi için lütfen Armstrong temsilcinize danışınız.

www.armstrong-ceilings.co.uk
www.armstrong.ae
www.armstrong.com.tr
www.armstrong.ru

Armstrong®