

# SAHARA

CI/SfB (35) Xy  
09/2010



[www.armstrong.eu](http://www.armstrong.eu)



# SAHARA



## SAHARA

	BOARD	TEGULAR	MICROLOOK	MICROLOOK BE	VECTOR
	Prelude XL <sup>2</sup> /TLX 24 mm Prelude Sixty <sup>2</sup>	Prelude XL <sup>2</sup> /TLX 24 mm Prelude Sixty <sup>2</sup>	Prelude XL <sup>2</sup> /TL 15 mm Interlude XL <sup>2</sup> 15 mm	Prelude XL <sup>2</sup> /TL 15 mm Silhouette XL <sup>2</sup> 15 mm Interlude XL <sup>2</sup> 15 mm	Prelude XL <sup>2</sup> 24 mm Prelude Sixty <sup>2</sup> /XL <sup>2</sup>
<b>SAHARA</b>					
600 x 600 x 15 mm	2516 M	2518 M	2519 M	2524 M	
625 x 625 x 15 mm	2516 D	2518 D	2519 D		
600 x 600 x 19 mm					3322 M
675 x 675 x 15 mm	2520 M	2521 M		2690 M	
600 x 1200 x 15 mm	2517 M	2522 M	2731 M		
625 x 1250 x 15 mm	2517 D				
300 x 1200 x 15 mm			2730 M		
<b>SAHARA Unperforated</b>					
600 x 600 x 15 mm	2610 M	2612 M	2613 M		
625 x 625 x 15 mm	2610 D				
600 x 1200 x 15 mm	2611 M				




COLORTONE DUNE: Opal (OL), Carrara (CA), Platinum (PN), Toledo (TO), Blue Mountain (BT).



EN ISO 354 & EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz	$\alpha_p$
• SAHARA Board, Tegular, MicroLook, MicroLook BE	<b>0.60</b>	0.55	0.45	0.40	0.55	0.65	0.65	0.60	$\alpha_p$
• SAHARA Vector	<b>0.65</b>	0.65	0.45	0.50	0.60	0.70	0.70	0.55	$\alpha_p$
• SAHARA Unperforated Board, Tegular, MicroLook	<b>0.10(L)</b>	0.15	0.30	0.20	0.10	0.10	0.10	0.20	$\alpha_p$

**Sound Absorption Class = C (perforated)**  
**Sound Absorption Class = not classified (unperforated)**

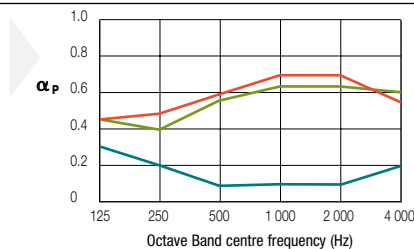

EN ISO 10849-2 / EN 2014069 & EN ISO 717-1

<b>Dncw</b>	<b>34 dB</b> (SAHARA and SAHARA Unperforated)
<b>Dnfw</b>	<b>35 dB</b> (SAHARA Vector)



EN ISO 140-3 & EN ISO 717-1

<b>Rw</b>	<b>17 dB</b>
-----------	--------------



EN 13501-1

<b>EAA</b>	Euroclass A2-s1, d0
------------	---------------------



EN 12667 & ISO 8301

$\lambda$	= 0.06 W/m K
-----------	--------------



95 % RH



**15 YEAR**  
guarantee



≈ 3.9 kg/m<sup>2</sup> (SAHARA)  
≈ 5.9 kg/m<sup>2</sup> (SAHARA Vector)

\*Recycled Content: 43% SAHARA Vector - 41% SAHARA \*\*Light Reflectance: 84% SAHARA and SAHARA Vector - 85% SAHARA Unperforated



- Please contact our Internal Technical Sales Group for further details.
- Pour de plus amples informations merci de contacter notre Service Information Plafonds.
- Weitere Informationen erhalten Sie von unserem Kundenservice. Änderungen vorbehalten.
- Voor meer informatie kunt u contact opnemen met Market Service Center.
- Per ulteriori dettagli consultare il nostro Ufficio Commerciale.
- Para más detalles, por favor, contacte con el Servicio de Información de Techos.
- W razie dodatkowych pytań prosimy kontaktować się z biurem Armstrong w Warszawie.

[www.armstrong.eu](http://www.armstrong.eu)

