

ULTIMA PLANKS

CI/SfB | (35) | Xy |
03/2011



www.armstrong.eu

Armstrong[®]


ULTIMA PLANKS



ULTIMA PLANKS

SL2

K2C2




Prelude 24 mm Main Runner
Prelude Sixty²



System Z



System Z



300 x 1500 x 19 mm

9954 M

312,5 x 1500 x 19 mm

9957 D

300 x 1720 x 19 mm

2736 M

300 x 1800 x 19 mm

9955 M

312,5 x 1800 x 19 mm

9958 D

300 x 2500 x 19 mm

9956 M

312.5 x 2500 x 19 mm


9959 D



EN ISO 354 &
EN ISO 11654

α	NRC	125	250	500	1000	2000	4000	Hz
0.70(H)	0.70	0.50	0.50	0.60	0.75	0.90	0.95	α

Sound Absorption Class = C

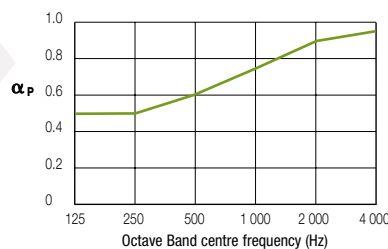

EN ISO 10848-2
& EN ISO 717-1

Dnfw
40 dB



EN ISO 140-3
& EN ISO 717-1

Rw
18 dB



EN 13501-1

EEA Euroclass A2-s1, d0

RUS G1, V1, D1, T1 to FZ 123



EN 12667
& ISO 8301

$\lambda = 0.052$ W/m K



95 % RH



15 YEAR
guarantee



≈ 5.2 kg/m²

- Please contact our Armstrong Technical Sales group for further details.
- Pour de plus amples informations merci de contacter notre Service Information Plafonds.
- Weitere Informationen erhalten Sie von unserem Kundenservice. Änderungen vorbehalten.
- Voor meer informatie kunt u contact opnemen met Market Service Center.
- Per ulteriori dettagli consultare il nostro Ufficio Commerciale.
- Para más detalles, por favor, contacte con el Servicio de Información de Techos.
- W razie dodatkowych pytań prosimy kontaktować się z biurem Armstrong w Warszawie.
- За более подробной информацией обращайтесь пожалуйста в представительство компании Армстронг.

www.armstrong.eu

Armstrong