


NEW PRELUDE 24 SYSTEM S


Exposed Suspension System 24 mm

Main Runner Prelude 24 System S Peakform and Superlock Clip (bulb-to-bulb connection)

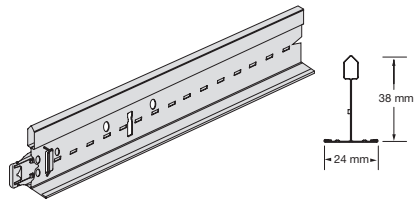


Item Nr.	Dimensions		Content / Carton		Weight / Carton	Cartons / Pallet
	length (mm)	height (mm)	pcs	lm		
BP 38 40 32 DW A	3600	38	20	72	19,80	30

Cross Tees Prelude System S XL² (stab system, override)

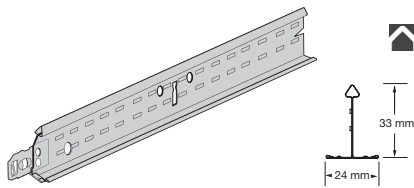

Cross Tee slotted (at 300 mm)

BP 38 30 51 DW	1200	33	60	72	15,90	72
----------------	------	----	----	----	-------	----

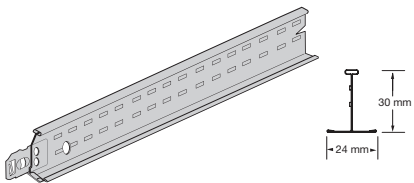


Cross Tee unslotted


BP 38 20 21 DW	600	30	60	36	8,20	144
----------------	-----	----	----	----	------	-----

Section Drawings


Main Runner Prelude 24 System S



Cross Tee Prelude 24 System S



Cross Tee Prelude 24 System S



All measurements in millimetres. All dimensions are nominal.

Cross tee alignment is achieved by locating the tees to the right-hand side of the adjoining section.

NEW PRELUDE 24 SYSTEM S


Key Attributes

- Peakform**
 Patented universal main runner and long tee design increase strength and stability for improved performance and makes the grid easier to cut
- Rotary stitched**
 Main Runner and Cross Tees for additional torsional strength and extra stability during installation

Physical Data

- Material**
 Double-web galvanised steel
- Surface Finish**
 Baked polyester paint
- Product Family**
 Exposed tee system
- Main Runner / Cross Tee Interface**
 Joggled ends
- End Detail**
 Main Runner : by pass coupling, single stitching
 Cross Tees : staked-on stab clip, double stitching
- Colour**
 Available in White only.

Load Capacity

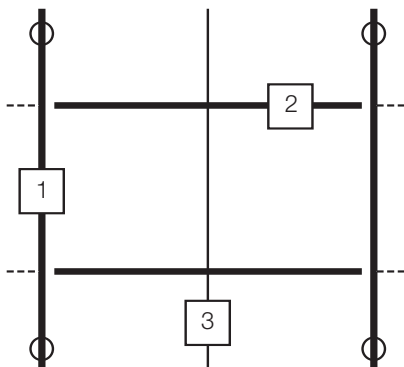

Maximum load = 9.5 kg/m²
 Suspension points at 1200 mm centres,
 deflection L/500 (4 mm max.) according
 to EN 13964 : 2004 / A1 : 2006 standard

- 1 BP 38 40 32 DW A
- 2 BP 38 30 51 DW
- 3 BP 38 20 21 DW

All product specifications are subject to modifications without prior notice. Please contact the **Internal Technical Sales Group** for further details.

UNITED KINGDOM / REPUBLIC OF IRELAND Armstrong World Industries Ltd.

Building Products Division
 Armstrong House
 38 Market Square
 Uxbridge UB8 1NG
 Tel : **0800 371849 (UK)** **FREEPHONE**
1800 409002 (ROI)
 Fax : +44 (0) 1895 274287
 e-mail : sales-support@armstrong.com

www.armstrong-ceilings.co.uk
www.armstrong-ceilings.ie
www.armstrong.eu